

FLOORING



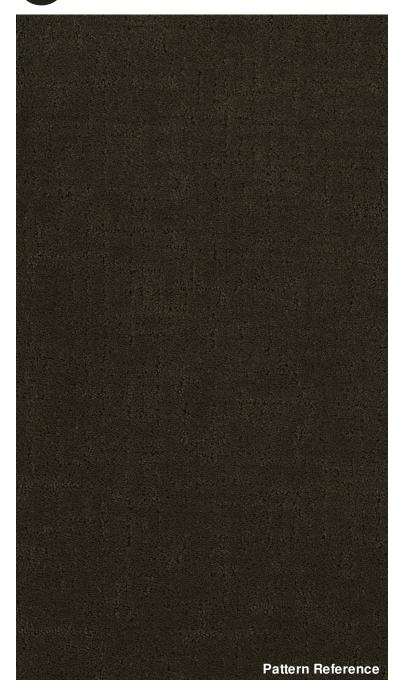

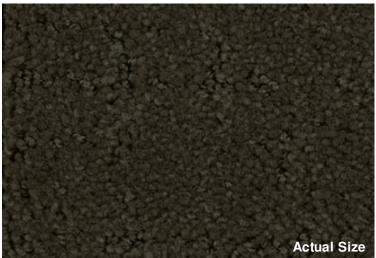

## Tussah (9144)

**Product Quick Specs** 

| Color Name/NumberChicory 360ConstructionMulti-Level Tip Sheared LoopSelected BackingPremierBac® Plus (standard<br>backing)Dye MethodBeck DyedFiber TypeType 6,6 NylonFace Weight32 oz./sy (1085 grams/m2)Pile Density5760 oz./y3 (213.58 kg/m3)Pattern Repeat24.00" (w) x 28.00" (l) approx.<br>(60.96cm x 71.12cm)Gauge1/10 (3.94 rows/cm)Stitches12.5 stitches/in (4.92 stitches/cm)Standard Width12 ft 3.66 mStandard AdhesiveCommercialon Premium Carpet<br>AdhesiveSmoke DensityLess then 450 flamingStatic TestLess then 4 kvStandard WarrantiesPremierBac Plus<br>Commercialon Premium<br>Broadloom AdhesiveOptional WarrantiesEndure Plus<br>TitanBac Plus | Style Name/Number   | Tussah 9144                         |
|--|---------------------|-------------------------------------|
| Selected BackingPremierBac® Plus (standard backing)Dye MethodBeck DyedFiber TypeType 6,6 NylonFace Weight32 oz./sy (1085 grams/m2)Pile Density5760 oz./y3 (213.58 kg/m3)Pattern Repeat24.00" (w) x 28.00" (l) approx. (60.96cm x 71.12cm)Gauge1/10 (3.94 rows/cm)Stitches12.5 stitches/in (4.92 stitches/cm)Standard Width12 ft 3.66 mStandard AdhesiveCommercialon Premium Carpet AdhesiveSmoke DensityLess then 450 flamingStatic TestLess then 4 kvStandard WarrantiesPremierBac Plus Commercialon Premium Broadloom AdhesiveOptional WarrantiesEndure Plus   | Color Name/Number   | Chicory 360                         |
| backing)Dye MethodBeck DyedFiber TypeType 6,6 NylonFace Weight32 oz./sy (1085 grams/m2)Pile Density5760 oz./y3 (213.58 kg/m3)Pattern Repeat24.00" (w) x 28.00" (1) approx.<br>(60.96cm x 71.12cm)Gauge1/10 (3.94 rows/cm)Stitches12.5 stitches/in (4.92 stitches/cm)Standard Width12 ft 3.66 mStandard AdhesiveCommercialon Premium Carpet<br>AdhesiveSmoke DensityLess then 450 flamingStatic TestLess then 4 kvStandard WarrantiesPremierBac Plus<br>Commercialon Premium<br>Broadloom AdhesiveOptional WarrantiesEndure Plus  | Construction        | Multi-Level Tip Sheared Loop        |
| Fiber TypeType 6,6 NylonFace Weight32 oz./sy (1085 grams/m2)Pile Density5760 oz./y3 (213.58 kg/m3)Pattern Repeat24.00" (w) x 28.00" (l) approx.<br>(60.96cm x 71.12cm)Gauge1/10 (3.94 rows/cm)Stitches12.5 stitches/in (4.92 stitches/cm)Standard Width12 ft 3.66 mStandard AdhesiveCommercialon Premium Carpet<br>AdhesiveSmoke DensityLess then 450 flamingStatic TestLess then 4 kvStandard WarrantiesPremierBac Plus<br>Commercialon Premium<br>Broadloom AdhesiveOptional WarrantiesEndure Plus   | Selected Backing    |                                     |
| Face Weight32 oz./sy (1085 grams/m2)Pile Density5760 oz./y3 (213.58 kg/m3)Pattern Repeat24.00" (w) x 28.00" (l) approx.<br>(60.96cm x 71.12cm)Gauge1/10 (3.94 rows/cm)Stitches12.5 stitches/in (4.92 stitches/cm)Standard Width12 ft 3.66 mStandard AdhesiveCommercialon Premium Carpet<br>AdhesiveSmoke DensityLess then 450 flamingStatic TestLess then 4 kvStandard WarrantiesPremierBac Plus<br>Commercialon Premium<br>Broadloom AdhesiveOptional WarrantiesEndure Plus   | Dye Method          | Beck Dyed                           |
| Pile Density5760 oz./y3 (213.58 kg/m3)Pattern Repeat24.00" (w) x 28.00" (l) approx.<br>(60.96cm x 71.12cm)Gauge1/10 (3.94 rows/cm)Stitches12.5 stitches/in (4.92 stitches/cm)Standard Width12 ft 3.66 mStandard AdhesiveCommercialon Premium Carpet<br>AdhesiveSmoke DensityLess then 450 flamingStatic TestLess then 4 kvStandard WarrantiesPremierBac Plus<br>Commercialon Premium<br>Broadloom AdhesiveOptional WarrantiesEndure Plus   | Fiber Type          | Type 6,6 Nylon                      |
| Pattern Repeat24.00" (w) x 28.00" (l) approx.<br>(60.96cm x 71.12cm)Gauge1/10 (3.94 rows/cm)Stitches12.5 stitches/in (4.92 stitches/cm)Standard Width12 ft 3.66 mStandard AdhesiveCommercialon Premium Carpet<br>AdhesiveSmoke DensityLess then 450 flamingStatic TestLess then 4 kvStandard WarrantiesPremierBac Plus<br>Commercialon Premium<br>Broadloom AdhesiveOptional WarrantiesEndure Plus   | Face Weight         | 32 oz./sy (1085 grams/m2)           |
| Gauge1/10 (3.94 rows/cm)Stitches12.5 stitches/in (4.92 stitches/cm)Standard Width12 ft 3.66 mStandard AdhesiveCommercialon Premium Carpet<br>AdhesiveSmoke DensityLess then 450 flamingStatic TestLess then 4 kvStandard WarrantiesPremierBac Plus<br>Commercialon Premium<br>Broadloom AdhesiveOptional WarrantiesEndure Plus   | Pile Density        | 5760 oz./y3 (213.58 kg/m3)          |
| Stitches12.5 stitches/in (4.92 stitches/cm)Standard Width12 ft 3.66 mStandard AdhesiveCommercialon Premium Carpet<br>AdhesiveSmoke DensityLess then 450 flamingStatic TestLess then 4 kvStandard WarrantiesPremierBac Plus<br>Commercialon Premium<br>Broadloom AdhesiveOptional WarrantiesEndure Plus   | Pattern Repeat      |                                     |
| Standard Width12 ft 3.66 mStandard AdhesiveCommercialon Premium Carpet<br>AdhesiveSmoke DensityLess then 450 flamingStatic TestLess then 4 kvStandard WarrantiesPremierBac Plus<br>Commercialon Premium<br>Broadloom AdhesiveOptional WarrantiesEndure Plus  | Gauge               | 1/10 (3.94 rows/cm)                 |
| Standard AdhesiveCommercialon Premium Carpet<br>AdhesiveSmoke DensityLess then 450 flamingStatic TestLess then 4 kvStandard WarrantiesPremierBac Plus<br>Commercialon Premium<br>Broadloom AdhesiveOptional WarrantiesEndure Plus  | Stitches            | 12.5 stitches/in (4.92 stitches/cm) |
| AdhesiveSmoke DensityLess then 450 flamingStatic TestLess then 4 kvStandard WarrantiesPremierBac Plus<br>Commercialon Premium<br>Broadloom AdhesiveOptional WarrantiesEndure Plus  | Standard Width      | 12 ft 3.66 m                        |
| Static Test   Less then 4 kv     Standard Warranties   PremierBac Plus<br>Commercialon Premium<br>Broadloom Adhesive     Optional Warranties   Endure Plus   | Standard Adhesive   | 1                                   |
| Standard Warranties PremierBac Plus<br>Commercialon Premium<br>Broadloom Adhesive   Optional Warranties Endure Plus  | Smoke Density       | Less then 450 flaming               |
| Commercialon Premium<br>Broadloom Adhesive   Optional Warranties Endure Plus   | Static Test         | Less then 4 kv                      |
| •  | Standard Warranties | Commercialon Premium                |
|  | Optional Warranties |                                     |





## **Products Installed**



360 Chicory



**Installation Method** 

Custom

This three dimensional rendering is for visualization purposes only and may not be an exact representations of the selected products. Pile heights may vary from product to product and adhesive requirements may vary depending on product selection. The review of actual product samples are recommended before final selection. Please contact your J+J Flooring Group sales representative with any questions. This unique carpet design is protected under the U.S. Copyright Act of 1976. Any unauthorized copying or duplication of this design constitutes copyright infringement in violation of federal law.